



Electric Cantilever Centrifugal Slurry Pump Single Suction High Wear Resistance

Our Product Introduction

for more products please visit us on horizontal-slurrypump.com

Basic Information

- Place of Origin: Sichuan, China
- Brand Name: horizontal-slurrypump.com
- Certification: ISO9001
- Model Number: OEM
- Minimum Order Quantity: 1 set
- Price: USD500-5000/set
- Packaging Details: free fumigation export wooden box packaging
- Delivery Time: 25 working days after receiveing advance payment
- Payment Terms: L/C, D/A, D/P, T/T, Western Union, MoneyGram, Paypal
- Supply Ability: 300 sets per month



Product Specification

- Max Capacity: 3000 M³/h, 11000UK GPM
- Max Head: 130 M
- Flange: Customized
- Impeller: Closed/ Half Open
- OEM: Welcome
- Speed: 1450rpm To 2900rpm
- Theory: Slurry Pump
- Usage: Sludge Slurry Pump
- 111: 2222
- Highlight: horizontal centrifugal slurry pump



More Images



Product Description

Electric Cantilever Centrifugal Slurry Pump Single Suction High Wear Resistance Sludge Pump Types

Product Feature

1. This pump is horizontal cantilevered single-casing centrifugal slurry pump.
2. Construction of this pump is single casing connected by means of clamp bands and the discharge direction of pump can be

Our Product

oriented in any direction of 360. the type of pump possesses the advantages of easy installation.

3. The cylinder –type bearing assembly with oil lubrication is adopted by the pump. It is suit for adjusting the distance between impeller and pump. The bearing assembly uses oil lubrication.
4. Three kinds of shaft seal---mechanical seal, expeller seal and packing seal
5. Wide passage , good performance of NPSH, anti-wearing and anti-corrosion, and high efficiency,
6. The type of driver just have v belt driver, gearbox driver, elastic coupling driver, fluid couplings driver, frequency conversion driver, silicon controlled rectifier speed regulation etc.

Technical Parameter

Head	10 ~ 130 m
Capacity	4 ~ 3000 m³/h
Discharge Size	20mm~350mm
Inlet Size	32mm~400mm
Maximal Efficiency	70%
NPSH	0m~3m
Allowable Max Motor Power	315 kw
Diameter	200mm~470mm


Application of Slurry Pump

Slurry pump is one of the most widely used industrial pumps for conveying slurry and high-concentration slurry. Many industries, such as mining, power, steel, chemical, ceramics, etc., use slurry pumps to handle dense, high-density mud, solid-filled mud, or abrasive fluids. Slurry pump is the ideal pump, it can easily move ore such as coal, iron and other various types of mining waste.

The slurry pump has high reliability, durability and low power consumption. The pump is capable enough to handle difficult and difficult our tasks.

Structure

ZJ系列卧式渣浆泵结构简图

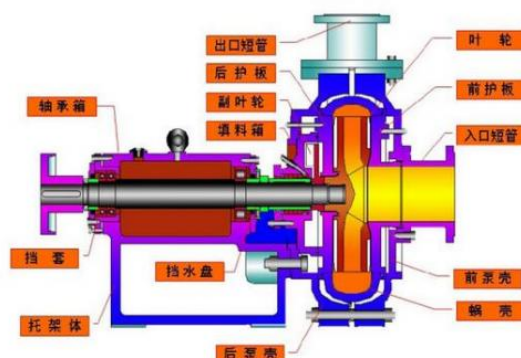


Product Picture




Installation Dimension

Single base

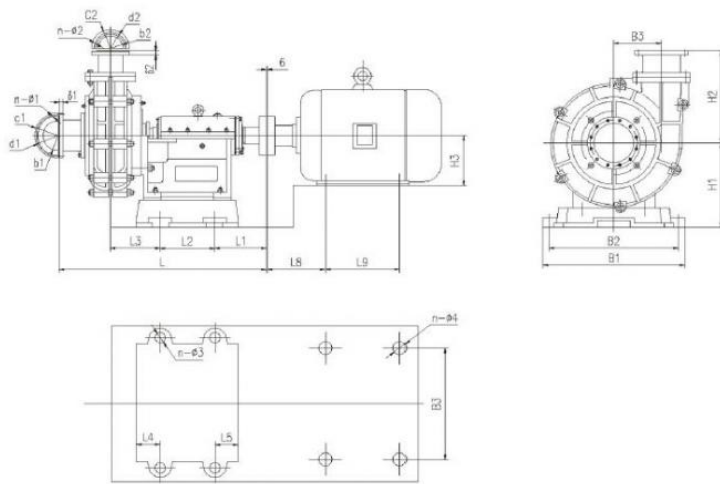

Sharing Base

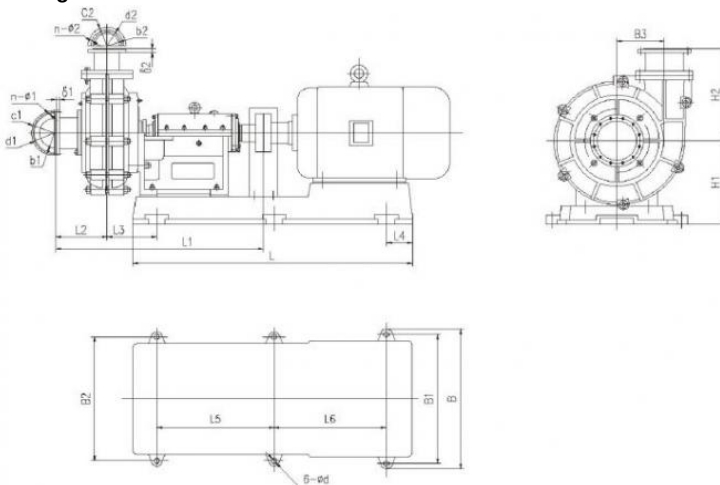

ROMAN Beijing Silk Road Enterprise Management Services Co.,LTD

86-17773109286

jeffreyth@slurrypump.com

horizontal-slurrypump.com

Floor 5, 2nd Building, Zhonglu Industrial Zone, Shenzhen City, Guangdong Province China (Mainland)