



Electric Submerged Vertical Slurry Pump Dewatering Corrosion Resistant

Our Product Introduction

Basic Information

- Place of Origin: Sichuan, China
- Brand Name: horizontal-slurrypump.com
- Certification: ISO9001
- Model Number: OEM
- Minimum Order Quantity: 1 set
- Price: USD 500-5000/set
- Packaging Details: Free Fumigation Export Wooden Box
- Delivery Time: 25 working days after receiveing advance payment
- Payment Terms: L/C, D/A, D/P, T/T, Western Union, MoneyGram, Paypal
- Supply Ability: 300 sets per month



Product Specification

- Max Flow: 364m³/H
- Max Head: 58m
- Material: Metal
- Color: Customized
- Voltage: 380V/660V/1140V
- Structure: Single-stage Pump
- Application: Sewage
- OEM: Acceptable
- Product Name: Electric Mud Slurry Pump
- Highlight: **vertical sump pump**

for more products please visit us on horizontal-slurrypump.com

Product Description

Electric Submerged Vertical Slurry Pump Dewatering Pump Corrosion Resistant

Features

1. Anti-wear, anti-abrasive, anti-corrosive.
2. High efficiency, lower noise, less vibration & long service life.
3. Top brand of shaft and bearings make slurry pump stronger.
4. Easily to install and disassemble the pump parts.


Application

The non-clogging sewage pump is applicable to transport the sewage containing particles, the clear water and corrosive medium in such industries as chemical engineering, petroleum, pharmacy, mining, paper making, cement mill, steel works, power plant, coal processing, drainage system of city sewage plant, public works and construction site.

Technical Parameter

Model	Clear Water Performance				
	Rotating speed n	Flow Q	Head(m) H	Shaft power Pa	Effectiveness η
	r/min	(m ³ /h)	m	kw	%
150ZJL-A35	590-980	119-364	4.4-17.9	3.9-15.3	63.1-68.1
100ZJL-A36	970-1480	76-239	15.3-51.1	9.6-32.1	54.1-58.9
80ZJL-A33	970-1480	42-157	8.1-48.6	8.7-33.2	52.3-56.5
65ZJL-A38	970-1470	50-120	19.4-52.3	6.9-28.8	42.7-45.8
65ZJL-A30	960-1470	25-98	11.1-34.7	2.3-13.4	43.7-51.9
50ZJL-A40	970-1470	21-65	16.5-58.3	5.5-22.1	29.9-34.1
50ZJL-A36	970-1470	36-85	13.1-42.7	4.7-20.7	31.2-39.4
50ZJL-A20	910-1440	10.8-38	4.3-10.7	0.4-2	31.2-38.6
40ZJL-A35	970-1470	15.8-47.6	13.6-42.9	3.8-14.1	27.3-33.8
40ZJL-A25	910-1440	6.6-22.9	7.2-21.5	0.6-2.8	26.1-37.6
40ZJL-A21	910-1140	6.0-9.5	6.8-17	0.4-2.6	27.9-44.6

Installation Dimension

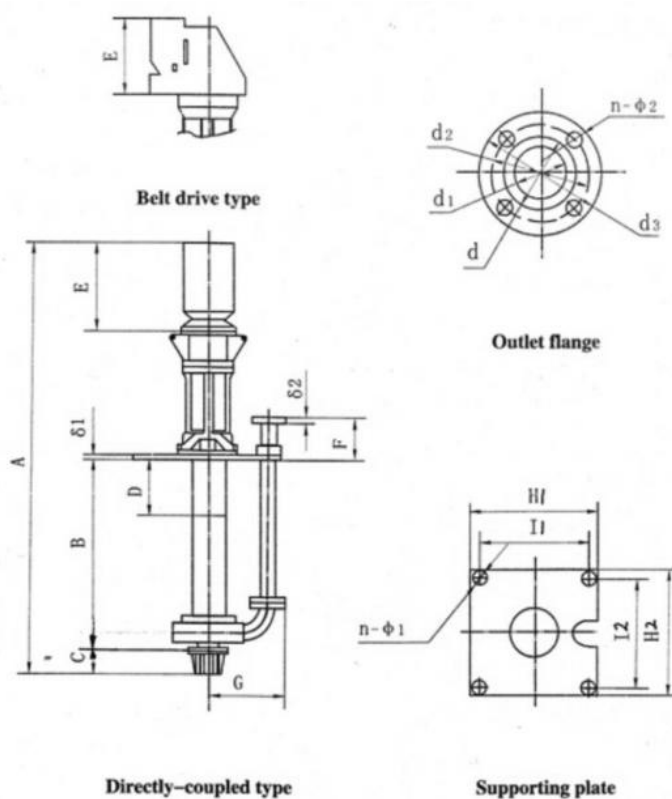

• Mining • Mineral processing • Construction • Chemical and Fertilization • Power generation	• Phosphate matrix fertilization • Pulp and paper • Waste sludge • Paper mill wastes and liquors • Precipitated CaCO₃	• Phosphoric acid
• Waste water treatment • Ball mill discharge • Rod mill discharge • SAG mill discharge • Fine tailing	• Flotation • Heavy media process • Minerals concentrate • Mineral sands • Coal-washing plant	• Coarse sand • Coarse tailing • Dredging • FGD • Wet crushers applications

Product Picture



 **ROMAN** Beijing Silk Road Enterprise Management Services Co.,LTD

 86-17773109286

 jeffreyth@slurypump.com

 horizontal-slurypump.com

Floor 5, 2nd Building, Zhonglu Industrial Zone, Shenzhen City, Guangdong Province China (Mainland)