Sichuan, China

USD 500-5000/set

Free Fumigation Export Wooden Box

25 working days after receiveing advance

OEM

payment

# Abrasive Liquid Dewatering Vertical Slurry Pump Chemical with Spare Parts

## **Basic Information**

- Place of Origin:
- Brand Name:
- Certification:
- Model Number:
- 1 set

Our Product Introduction

- Supply Ability:

### horizontal-slurrypump.com ISO9001

- Minimum Order Quantity:
- Price:
- Packaging Details:
- Delivery Time:
- Payment Terms:
  - L/C, D/A, D/P, T/T, Western Union, MoneyGram, Paypal 300 sets per month

# **Product Specification**

• Flow:	6 ~ 364m <sup>3</sup> / H
• Head:	6 58m
<ul> <li>Material:</li> </ul>	Corrosive Resistance Material
Color:	Customized
• Flange:	Customized
<ul> <li>Application:</li> </ul>	Sewage
• Voltage:	380V/660V/1140V
• Motor:	100% Copper Wire Sewage Water Sump Pump
<ul> <li>Product Name:</li> </ul>	Submerged Slurry Pump

- Product Name: vertical sump pump
- Highlight:

### **Product Description**

#### Abrasive Liquid Dewatering Vertical Slurry Pump Chemical Pump with Spare Parts

#### Parameter Data

Name	ZJL-series Vertical Slurry Pump	
Head	4 ~ 60 m	
Capacity	6 ~ 364m³/h	
Discharge Size	40mm~200mm	
Inlet Size	50mm~250mm	
Maximal Efficiency	70%	
NPSH	1.4m~3.5m	
Allowable Max Motor Power	315 kw	
Diameter	200mm~470mm	

#### **Product Summary**

#### Description

ZJL-series vertical slurry pumps are single stage single-suction centrifugal slurry pump. ZJL-series pumps are in accordance with theory of two-phase fluids and they are designed according to the principle of minimizing the total loss. Geometrical shape of its flow passage components is suitable for flow condition of medium. In this way, the hydraulic loss among parts where eddy and impacting occur is reduced so that abrasion of flow passage components is reduced; water efficiency is increased; running noises and vibration are reduced. High-chrome alloy, which has high wear resistance, corrosion resistance and impact resistance, is used for flow passage components to improve service life.

#### Pump Features:

- · The wear parts are made of high-chrome alloy of abrasion resistance .
- · High efficiency and energy efficiency .
- · Light weight and long service life time .
- · Rational construction and reliable operation.
- · Lower noise and vibration of the pump translates into improved hydraulic efficiency.

#### Widely Applications:


1. Many kinds of minings, such as gold mining, copper mining, coal mining, iron mining, tin mining, sand mining, and so on. 2. Many kinds of factories, such as alumina factory, coal factory, suger factory, chemical factory, water treatment factory.cement factory and so on.

3. Mineral, river sand dredging, sand booster application, Mineral processing, and dewatering work.

#### Structure

1	Volute casing	2	support	3	Motor base
4	Impeller	5	Left support plate	6	Discharge pipe
7	Rear liner plate	8	Bearing body	9	Right support plate

#### **Product Picture**

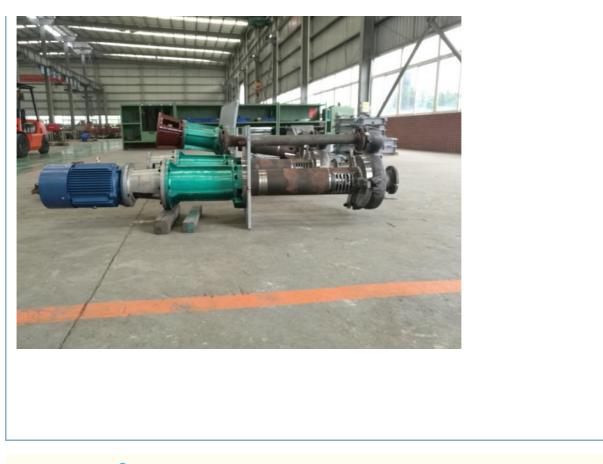

@ ROMAN Beijing Silk Road Enterprise Management Services Co.,LTD

86-17773109286

jeffreyth@slurrypump.com

le horizontal-slurrypump.com

Floor 5, 2nd Building, Zhonglu Industrial Zone, Shenzhen City, Guangdong Province China (Mainland)