

Large Capacity Horizontal Centrifugal Water Pump For Meter Mining ISO

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: horizontal-slurrypump.com
- Certification: ISO
- Model Number: OEM
- Minimum Order Quantity: 1 set
- Price: based on quantity
- Packaging Details: wooden case
- Delivery Time: 15days
- Supply Ability: 200sets monthly



Product Specification

- Colour: Blue/yellow
- Type: 75C-L
- MOQ: 1 Set
- Original: China
- Inlet: 75mm
- Bracket Type: C Type Bracket
- Highlight: diesel engine driven centrifugal pump

for more products please visit us on horizontal-slurrypump.com

Product Description

Large Capacity Horizontal Centrifugal Water Pump For Meter Mining 75C - L

Product overview for 75C-L model slurry pump

1. light duty slurry pump . They are suitable for delivering low abrasive low density slurry for metallurgical ,mining ,coal and building material departments.
2. The shaft seal can adopt gland seal ,expeller seal or mechanical seal .
3. Type L(R) pumps operate in high speed with small volumes and light weight to save floor area
- 4.It is mainly used to transport the slurry which contains fine particle size and weight concentration not more than 30%.The liner and impeller of this pump can be changeable ,either with anti-abrasive metal or rubber material .

Type meaning of 75C-L model slurry pump


Type meaning for 75C-L model slurry pump	
75C-L(R) model	
75	Pump outlet 75mm
C	pump bracket type
L	Low abrasion slurry pump
R	Natural Rubber

Performance table

type	Max.	ClearWaterPerformance					Impeller		Application
		Capacity	Head/m	Speed/rpm	Efficiency	NPSH	Nos	Diameter	
20 A-L	7.5	2.34-10.8	6-37	1400-3000	30	3.5-8	4	152.4	-Ball mill discharge
50 B-L	15	16.2-76	9-44	1400-2800	55	3.5-8	5	190	-Coarse tailings
75 C-L	30	18-151	4-45	900-2400	57		4	229	-Rod mill discharge
100 D-L	60	50-252	7-46	800-1800	60		4	305	-Coal washing
150 E-L	120	115-486	12-51.5	800-1500	65		4	381	-Wet crushers
200 E-L	120	234-910	9.5-40	600-1100	64		4	457	-Phosphate matrix
250 F-L	120	396-1425		500-800	77		5	550	-Minerals concentrate
300 S-L	560	468-2538	8-60	400-950	79		5	653	-Lime grinding
350 S-L	560	650-2800	10-59	400-840	81		5	736	-FGD waste water
400 ST-L	560	720-3312	7-51	300-700	80		5	825	-Flotation
450 ST-L	560	1008-4356	9-48	300-600	80		5	933	-Process chemical
550 TU-L	1200	1980-7900	10-50	250-475	86		5	1213	-Pulp and paper

Selection & Performance Chart

L系列型谱图 Selection & Performance Chart

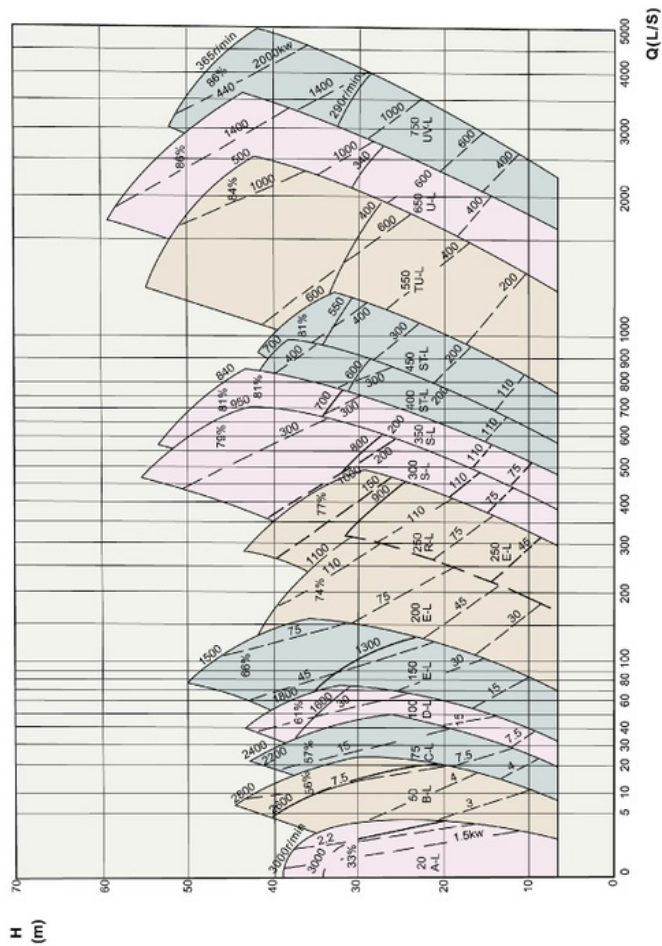

注：清水近似性能，仅供初步选型用

NOTE: Approximate performance for clear water, to be used for primary selection only.

ROMAN Beijing Silk Road Enterprise Management Services Co.,LTD

86-17773109286

jeffreyth@slurypump.com

horizontal-slurypump.com

Floor 5, 2nd Building, Zhonglu Industrial Zone, Shenzhen City, Guangdong Province China (Mainland)